

Steel grade

Material No. / Werkstoff-Nr.	PREMIUM 1.6587
Description	18CrNiMo7-6
AISI/SAE	4820
Search for alternatives in the ABRAMS STEEL GUIDE®	www.steel-guide.eu/alternatives/1.6587

Specifications



Round steel [RS]
black
L: 500 mm
L: 1.000 mm

Chemical composition AISI/SAE 4820 (reference value %)

C	Si	Mn	P	S	Cr	Mo	Ni
0,15 - 0,21	0 - 0,4	0,5 - 0,9	0 - 0,025	0 - 0,035	1,5 - 1,8	0,25 - 0,35	1,4 - 1,7

Physical properties

Hardness (delivery condition)	max. 229 HB, annealed			
Tensile strength R_m (as received condition)	approx. 770 N/mm ²			
Working hardness	max. 60 HRC (surface hardness)			
Thermal expansion coefficient $10^{-6}m/(m \cdot K)$	20 - 100°C	20 - 200°C	20 - 300°C	20 - 400°C
	11,5	12,5	13,3	13,9
Thermal conductivity $W/(m \cdot K)$	20°C			
	39,8			

Physical properties

CrNiMo alloyed case-hardening steel for highly stressed components with high core strength and toughness. This steel is used for gear parts such as ring gears or drive pinions and gear wheels. The AISI / SAE 4820 is usually difficult to weld.

Applications

Shafts, gear parts, gears, bevel gears, driving pinion.

Heat treatment

Normal annealing	Temperature	Cooling	Hardness
	650 - 700°C	Oil, Polymer	max. 229 HB
Core hardening	Temperature	Cooling	
	830 - 870°C	Oil, Polymer	
Surface hardening	Temperature	Quenching in	
	780 - 820°C	Oil, Polymer	

ABRAMS INDUSTRIES®
abrams-industries.eu

ABRAMS PREMIUM STEEL®
premium-steel.eu

ABRAMS PREMIUM ALUMINIUM®
premium-aluminium.eu

ABRAMS® PREMIUM TOOLS
premium-gewindebohrer.eu

ABRAMS STEEL GUIDE®
steel-guide.eu

Divisions of
ABRAMS Industries GmbH & Co. KG
Hannoversche Str. 38 / 46
49084 Osnabrück
Germany


County court Osnabrück / Germany, HRA 6865
GP: ABRAMS Industries Verwaltungs GmbH
Country court Osnabrück / Germany, HRB 20019
CEO: Dipl.-Wl.-Ing. Dr. Jürgen Abrams
COO: Ms. Nur H. Nezir, LL.B.

T: +49 541 / 357 39-0
sales@abrams-industries.eu
www.abrams-industries.eu/shop
VAT-No.: DE221940667

Bank details:
Bank: Sparkasse Osnabrück / Germany
SWIFT / BIC: NOLADE22
IBAN: DE63 2655 0105 1522 9268 96



Continuous ZTU-diagrams

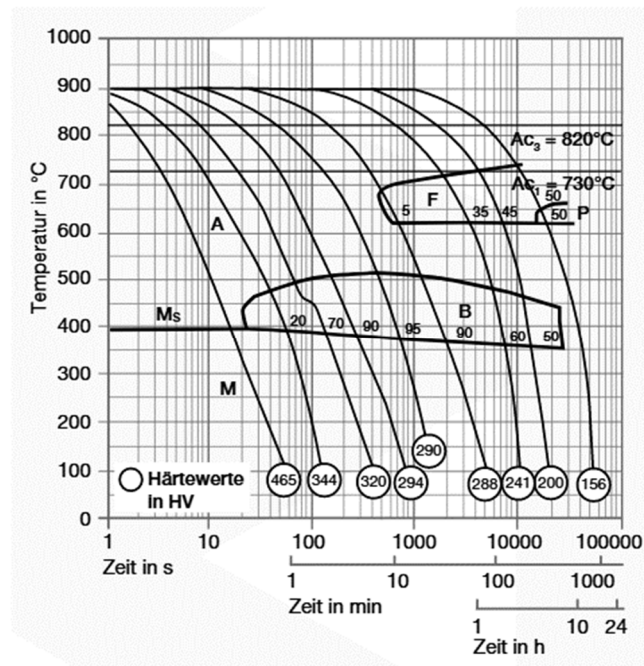

Hardenability scatter band

