

Steel grade

Material No. / Werkstoff-Nr.	PREMIUM 1.2083 ESU
Description	X40Cr14
BS	1.2083 ESR
AISI/SAE	420 ESR
Search for alternatives in the ABRAMS STEEL GUIDE®	www.steel-guide.co.uk/alternatives/1.2083ESR

Specifications



€co-Präz® [€co]
L: 300 mm
L: 500 mm

Chemical composition BS 1.2083 ESR (reference value %)

C	Si	Mn	P	S	Cr
0.36 – 0.42	0 – 1.0	0 – 1.0	0 – 0.03	0 – 0.03	12.5 – 14.5

Physical properties

Hardness (delivery condition)	max. 241 HB, annealed						
Tensile strength R_m (as received condition)	approx. 815 N/mm ²						
Working hardness	max. 55 HRC						
Thermal expansion coefficient $10^{-6}m/(m \cdot K)$	20 - 100°C	20 - 200°C	20 - 300°C	20 - 350°C	20 - 400°C	20 - 450°C	20 - 500°C
	11.1	11.6	12.0	12.3	12.4	12.5	12.6
Thermal conductivity $W/(m \cdot K)$	23°C	150°C	300°C	350°C	400°C	500°C	
	22.6	24.0	24.6	24.9	24.4	23.7	

Technical properties

Corrosion-resistant cold work steel and plastic mould steel, good machinability, good hardenability and excellent polishing properties. Low distortion through-hardening steel with high hardness and high wear resistance. For maximum required polishability use the ESR (Electro Slag Remelted Steel) production.

Applications

Mechanical engineering, medical technology, plastic moulds, synthetic resin mould tools, die casting tools, light metal die casting, cutting tools, machine knives, kitchen knives, razors, shears, scraper blades, surgical instruments, measuring tools, roller bearings, ball bearings, ice-skates, pump parts, valves.




Heat treatment

	Temperature	Cooling	Hardness			
Soft annealing	760 - 800°C	Furnace	max. 241 HB			
Stress relief annealing	600 - 650°C	Furnace				
	Temperature	Quenching in	Hardness after quenching			
Hardening	1000 - 1050°C	Oil, basin (500 - 550°C)	56 HRC			
	100°C	200°C	300°C	400°C	500°C	600°C
Tempering	56 HRC	55 HRC	52 HRC	51 HRC	52 HRC	40 HRC


Continuous ZTU-diagram

Werkstoff: X40Cr14, 1.2083

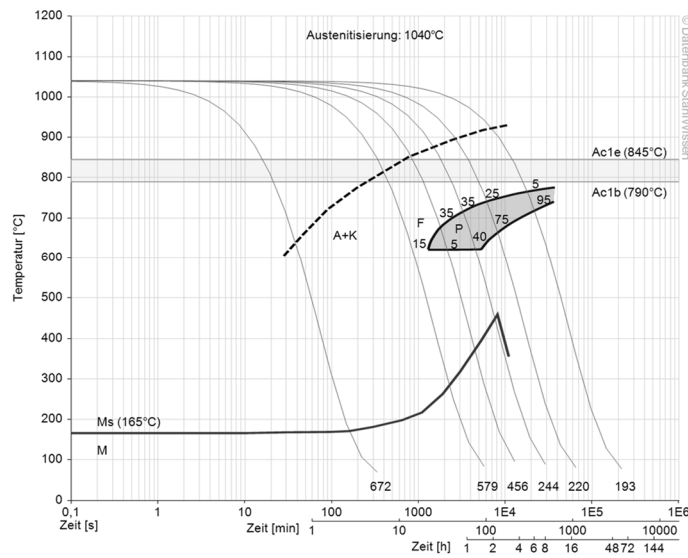


Tempering diagrams

Werkstoff: X40Cr14, 1.2083

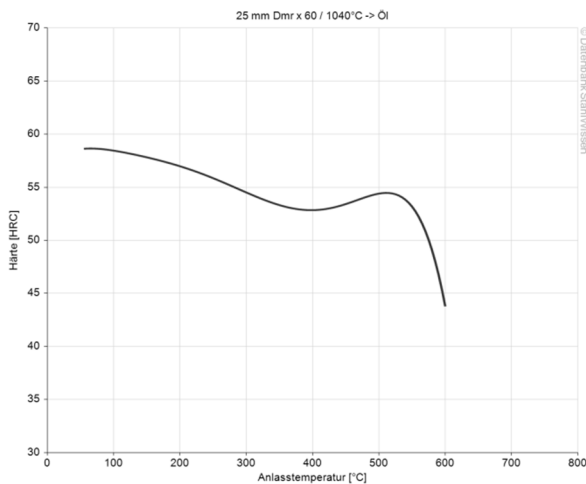

Werkstoff: X40Cr14, 1.2083

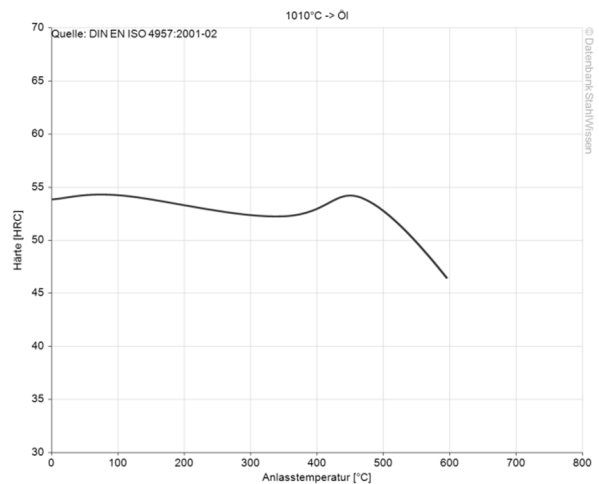

The data shown here is to be used only as an indication of the statistics, thus we accept no liability.
Diagrams are taken from Datenbank StahlWissen - Dr. Sommer Werkstofftechnik
Issued: 2012

