


Steel grade

Material No. / Werkstoff-Nr.	PREMIUM 1.7131
Description	16MnCr5, EC 80
BS	527 M 17
AISI/SAE	5115
Search for alternatives in the ABRAMS STEEL GUIDE®	www.steel-guide.co.uk/alternatives/527M17


Specifications



Precision flat steel with machining allowance [PFS/BA]
L: 1,000 mm



€co-Präz* [€co]
L: 500 mm



Round steel [RS]
black
L: 500 mm
L: 1,000 mm

Chemical composition BS 527 M 17 (reference value %)

C	Si	Mn	P	S	Cr
0.14 – 0.19	0 – 0.4	1.0 – 1.3	0 – 0.025	0 – 0.035	0.8 – 1.1

Physical properties

Hardness (delivery condition)	max. 217 HB, annealed			
Tensile strength R_m (as received condition)	approx. 720 N/mm ²			
Working hardness	max. 60 HRC (surface hardness)			
Thermal expansion coefficient $10^{-6}m/(m \cdot K)$	20 - 100°C	20 - 200°C	20 - 300°C	20 - 400°C
	11.5	12.5	13.3	13.9
Thermal conductivity $W/(m \cdot K)$	20°C			
	44.0			

Technical properties

Cold work and plastic mould steel (group of case hardening steel) with the objective of high surface hardness with core toughness. Excellent machinability, good cold hobbing and polishing properties. The tensile strength is a result of the combination of hardened surface and tough core.

Applications


Mechanical engineering, jig construction, plant engineering, apparatus engineering, plastic processing, plastic moulds, synthetic resin mould tools, base plates, bending bars, guide columns, gear parts, joint parts, shafts, gears, rods, bevel gears, crown wheels, piston pins, camshafts, bolts, pins, cardan joints.




Heat treatment

	Temperature	Cooling	Hardness
Soft annealing	650 - 700°C	Furnace	max. 217 HB
Hardening		Quenching in	
Core hardening	860 - 900°C	Oil, hot basin (160 - 250°C)	
Surface hardening	780 - 820°C	Oil, hot basin (160 - 250°C)	
Tempering		Cooling	
	150 - 200°C	Air	

Thermal expansion coefficient diagram

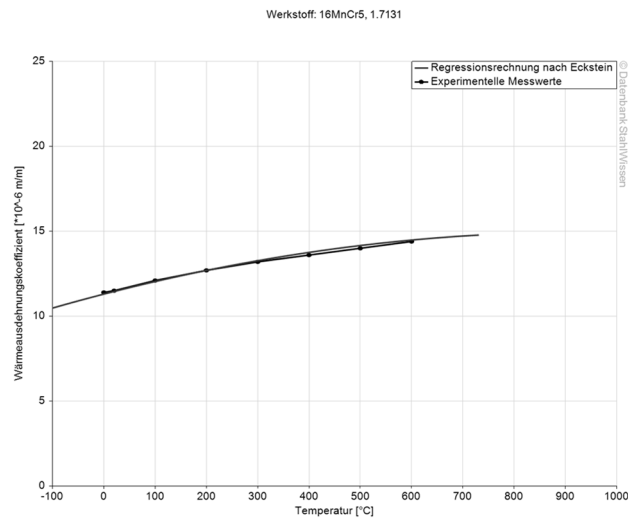


Thermal conductivity diagram

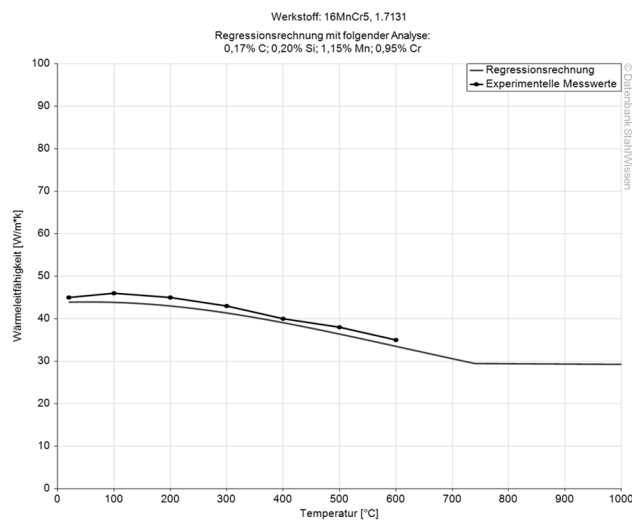

Thermal capacity diagram

Werkstoff: 16MnCr5, 1.7131

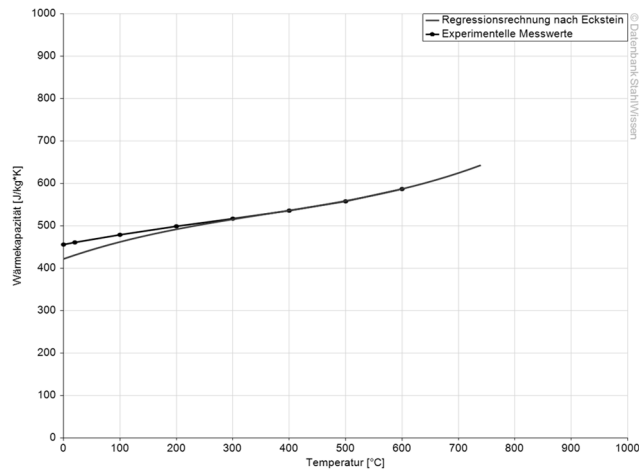


Continuous ZTU-diagrams

Werkstoff: 16MnCr5, 1.7131

Schmelzanalyse:

0,16% C; 0,22% Si; 1,12% Mn; 0,030% P; 0,008% S; 0,99% Cr; 0,02% Mo; 0,12% Ni; 0,010% V; 0,015% Al

Austenitisierung: 870°C, 15 min.

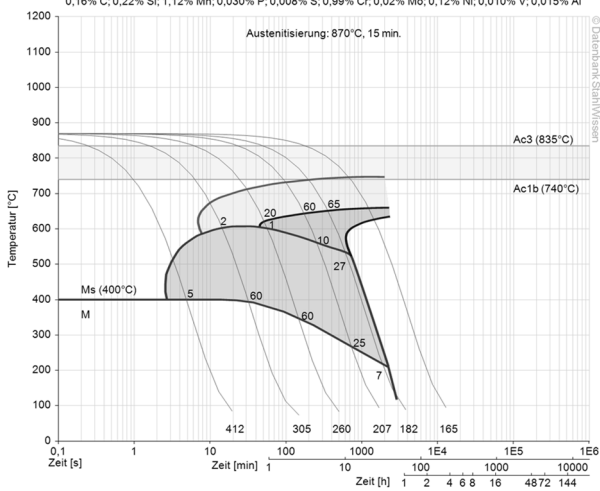


Werkstoff: 16MnCr5, 1.7131

Schmelzanalyse:

0,90% C; 0,22% Si; 1,12% Mn; 0,99% Cr; 0,02% Mo; 0,12% Ni; 0,010% V; 0,22% Cu; 0,015% Al


Austenitisierung: 830°C, 15 min.

Aufgekohlt ~-0,9 % C

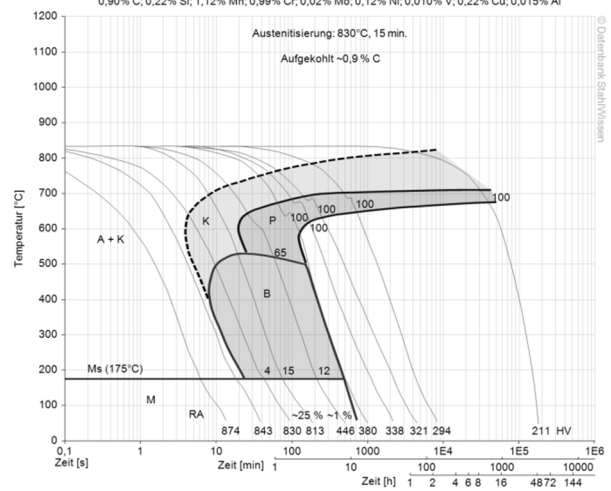

Isothermalal ZTU-diagram

Werkstoff: 16MnCr5, 1.7131

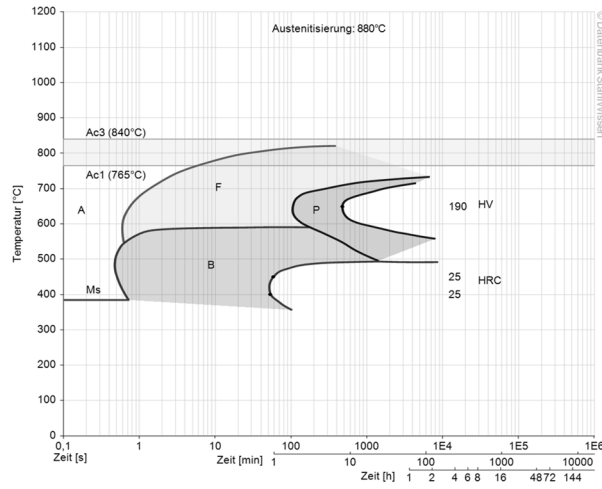

The data shown here is to be used only as an indication of the statistics, thus we accept no liability.
Diagrams are taken from Datenbank StahlWissen - Dr. Sommer Werkstofftechnik
Issued: 2012

